


# BLVR SERIES LOW VOLTAGE PRESSURE SENSORS

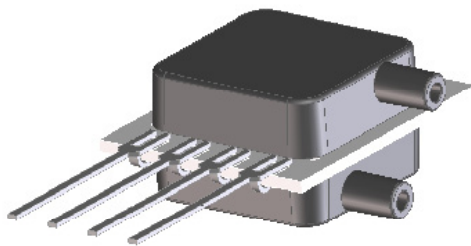

## Features

- 0 to 1 inH<sub>2</sub>O to 0 to 30 inH<sub>2</sub>O Pressure Ranges
- Low Supply Voltage (1.8V to 3.3V)
- 40% Less Power Than Mini-Basic Series
- 0.3% Linearity
- Improved Front to Back Linearity
- Offset Compensated
- Superior Position Sensitivity
- Improved Warm-Up Shift Distribution
- Parylene Coating Available Upon Request

## Applications

- Medical Instrumentation
- Environmental Controls
- HVAC

## General Description

The BLVR Series Basic Sensor is based on a Dual Die Reference technology to reduce all output offset or common mode errors. It also incorporates All Sensors CoBeam<sup>2</sup> Technology to reduce the overall supply voltage while maintaining comparable output levels to traditional equivalent basic sensing elements. This lower supply voltage leads to improved warm-up shift while the CoBeam<sup>2</sup> Technology itself reduces package stress susceptibility resulting in improved overall long term stability.

This series is intended for use with non-corrosive, non-ionic working fluids such as air, dry gases and the like. The output is also ratiometric to the supply voltage and is operable from 1.8 to 3.3 volts DC.

| Standard Pressure Ranges              |                 |                |                | Equivalent Circuit           |                                 |
|---------------------------------------|-----------------|----------------|----------------|------------------------------|---------------------------------|
| Device                                | Operating Range | Proof Pressure | Burst Pressure |                              |                                 |
| BLVR-L01D                             | ±1 inH2O        | 20 inH2O       | 30 inH2O       |                              |                                 |
| BLVR-L05D                             | ±5 inH2O        | 50 inH2O       | 75 inH2O       |                              |                                 |
| BLVR-L10D                             | ±10 inH2O       | 100 inH2O      | 150 inH2O      |                              |                                 |
| BLVR-L20D                             | ±20 inH2O       | 200 inH2O      | 300 inH2O      |                              |                                 |
| BLVR-L30D                             | ±30 inH2O       | 300 inH2O      | 450 inH2O      |                              |                                 |
| Pressure Sensor Maximum Ratings       |                 |                |                | Environmental Specifications |                                 |
| Supply Voltage (Vs)                   |                 | 6 Vdc          |                | Temperature Ranges           |                                 |
| Common Mode Pressure                  |                 | 50 psig        |                |                              |                                 |
| Lead Temperature (soldering 2-4 sec.) |                 | 270 °C         |                | Operating                    | -25 to 85 °C                    |
|                                       |                 |                |                | Storage                      | -40 to 125 °C                   |
|                                       |                 |                |                | Humidity Limits              | 0 to 95% RH<br>(non condensing) |



## Performance Characteristics for BLVR Series

ALL PARAMETERS ARE MEASURED AT 3.3 VOLT EXCITATION AND ROOM TEMPERATURE UNLESS OTHERWISE SPECIFIED. PRESSURE MEASUREMENTS ARE WITH POSITIVE PRESSURE APPLIED TO PORT B (THE ONLY PORT FOR THE SINGLE PORT CONFIGURATION).

| Parameter                                    | Min   | Typ   | Max   | Units  | Notes |
|----------------------------------------------|-------|-------|-------|--------|-------|
| Output Span                                  |       |       |       |        |       |
| L01D @ 1 inH2O                               | 3.71  | -     | 6.35  | mV     | 4     |
| L05D @ 5 inH2O                               | 14.85 | -     | 27.23 | mV     | 4     |
| L10D @ 10 inH2O                              | 14.85 | -     | 36.30 | mV     | 4     |
| L20D @ 20 inH2O                              | 14.85 | -     | 36.30 | mV     | 4     |
| L30D @ 30 inH2O                              | 11.14 | -     | 40.84 | mV     | 4     |
| Offset Voltage @ Zero Diff. Pressure         | -     | -     | ±8.0  | mV     | -     |
| Offset Temperature Shift (0°C-70°C)          | -     | ±0.1  | -     | mV     | 1     |
| Offset Warm-up Shift                         | -     | ±10   | ±80   | µV     | 2     |
| Offset Position Sensitivity (1g)             | -     | ±0.2  | -     | µV     | -     |
| Offset Long Term Drift (One Year)            | -     | ±80   | -     | µV     | -     |
| Linearity, Hysteresis Error                  | -     | 0.1   | ±0.3  | %FSS   | 3     |
| Response Time (10% to 90% Pressure Response) | -     | 100   | -     | µS     | -     |
| Front to Back Linearity                      | -     | 0.25  | -     | %FSS   | 5     |
| Temperature Effect on Resistance (0°C-70°C)  | -     | 2800  | -     | ppm/°C | -     |
| Temperature Effect on Span (0°C-70°C)        | -     | -2000 | -     | ppm/°C | -     |
| Input Resistance                             | -     | 2.1   | -     | kΩ     | -     |
| Output Resistance                            | -     | 2.1   | -     | kΩ     | -     |

### Specification Notes

NOTE 1: SHIFT IS RELATIVE TO 25°C.

NOTE 2: SHIFT IS WITHIN THE FIRST HOUR OF EXCITATION APPLIED TO THE DEVICE.

NOTE 3: MEASURED AT ONE-HALF FULL SCALE RATED PRESSURE USING BEST STRAIGHT LINE CURVE FIT.

NOTE 4: THE SPAN IS THE ALGEBRAIC DIFFERENCE BETWEEN FULL SCALE OUTPUT VOLTAGE AND THE OFFSET VOLTAGE.

NOTE 5: FRONT-BACK LINEARITY COMPUTED AS: 
$$\text{Lin fb} = \left( \left| \frac{\text{Span front}}{\text{Span back}} \right| - 1 \right) \cdot 100 \%$$

## How To Order

BLVR-  -   -  

**Series**

**Pressure Range**

| Option | Description |
|--------|-------------|
| L01D   | 1 inH2O     |
| L05D   | 5 inH2O     |
| L10D   | 10 inH2O    |
| L20D   | 20 inH2O    |
| L30D   | 30 inH2O    |

**Package**

| Option | Description                  |
|--------|------------------------------|
| B1NS   | Two Ports Same Direction     |
| B2NS   | Two Ports Opposite Direction |
| BGNS   | One Port                     |

**Coating**

| Option | Description      |
|--------|------------------|
| N      | No Coating       |
| P      | Parylene Coating |


(Consult with factory for parylene coating)

Example: BLVR-L10D-B1NS-N


Note: Parylene Coating is not available for pressure ranges below 10 inH2O and 25 mbar.

## Package Drawings


### B1NS Package

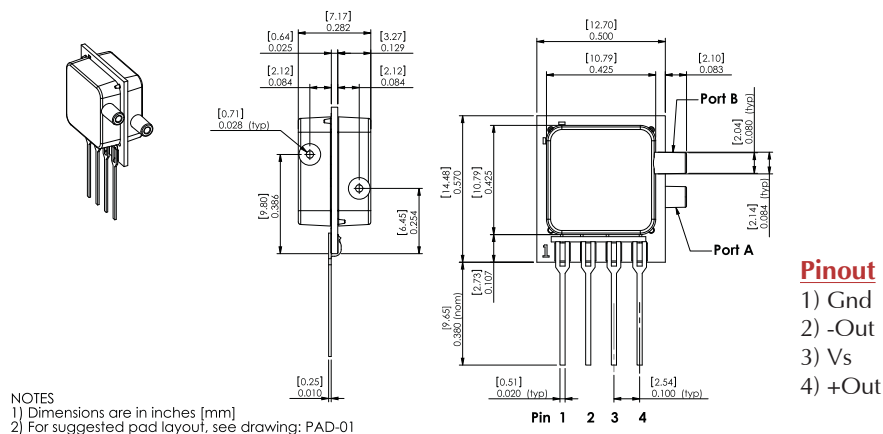


### B2NS Package

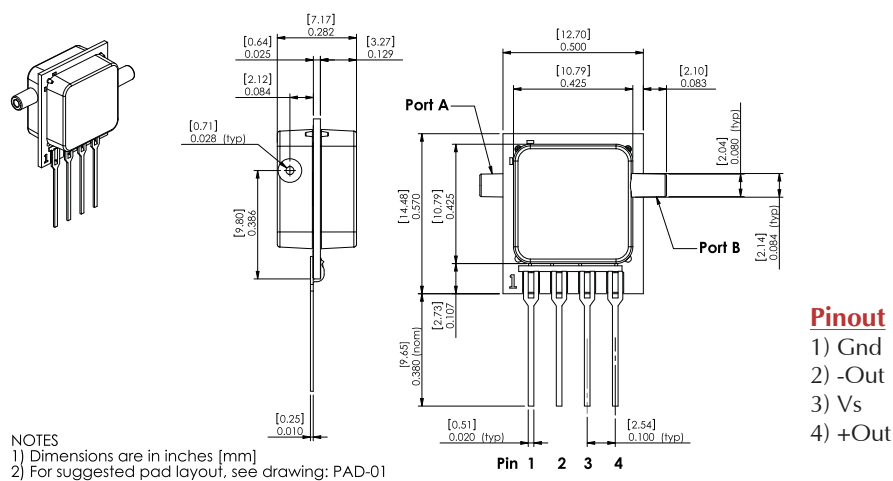

### BGNS Package

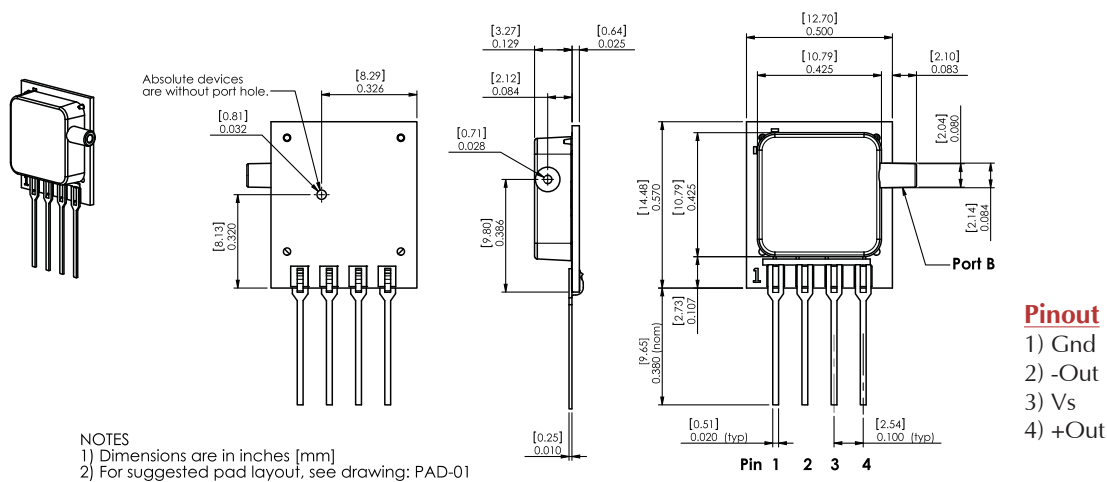

Package Characteristics

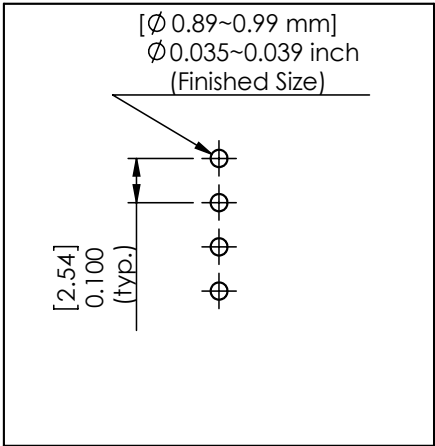

PAD-01

Package Characteristics

| Package ID | Approximate Port Volume |        |                 | Weight | Units |
|------------|-------------------------|--------|-----------------|--------|-------|
|            | Port A                  | Port B | Units           |        |       |
| B1NS       | 181                     | 173    | mm <sup>3</sup> | 1.2    | Grams |
| B2NS       | 181                     | 173    | mm <sup>3</sup> | 1.2    | Grams |
| BGNS       | 1.5                     | 173    | mm <sup>3</sup> | 0.9    | Grams |

Suggested Tubing Recommendations

| Tubing Recommendations |      |              |               |
|------------------------|------|--------------|---------------|
| ID                     | OD   | Material*    |               |
|                        |      | Low Pressure | High Pressure |
| 1/16"                  | 1/8" | Silicone     | Polyurethane  |

Product Marking Example

Company

Part Number

Lot Number

All Sensors

BLVR-L01D

B1NS-P

R24A01-01

All Sensors reserves the right to make changes to any products herein. All Sensors does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.